




沈阳三洋建筑机械有限公司  
SHENYANG SANYO BUILDING MACHINERY CO., LTD

TOWER CRANE QTP型140tm  
(R60/13标准型)




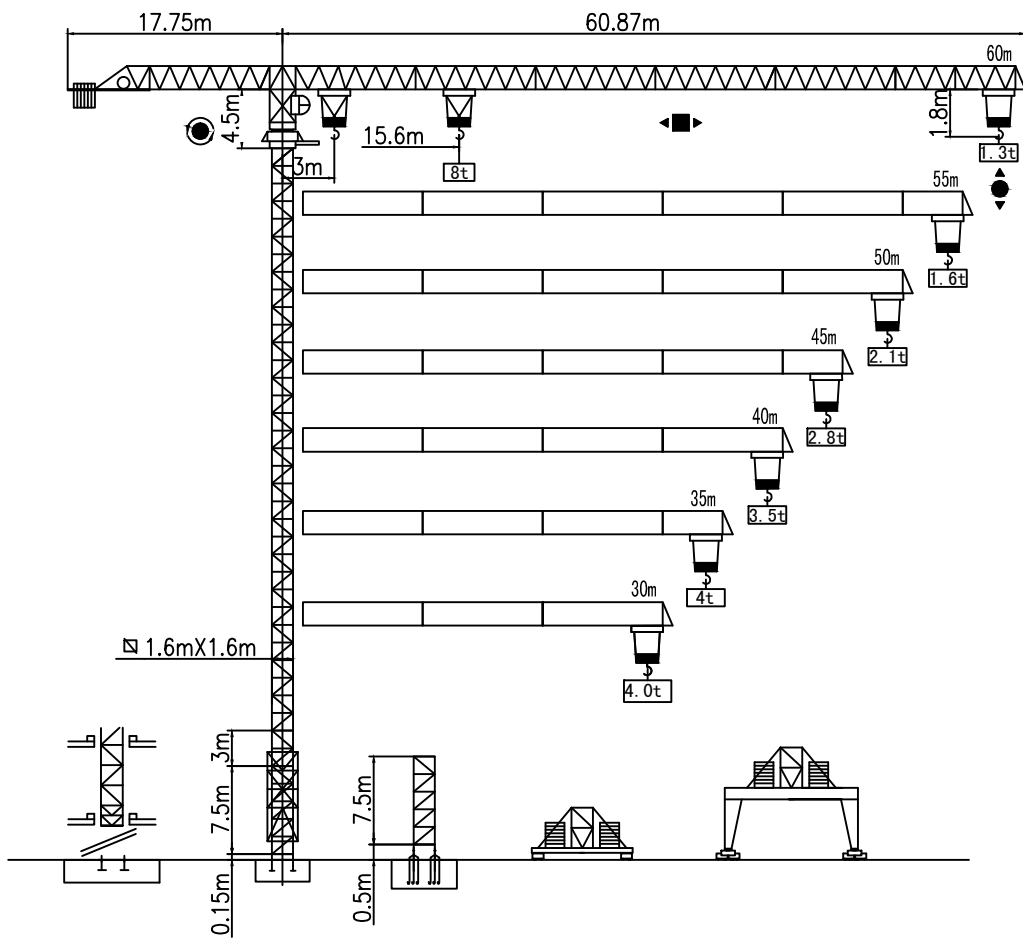


塔身截面 Mast 1.6m x 1.6m

60m

H (m)

H (m)

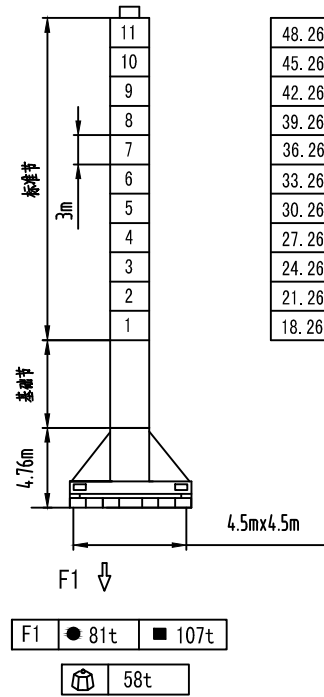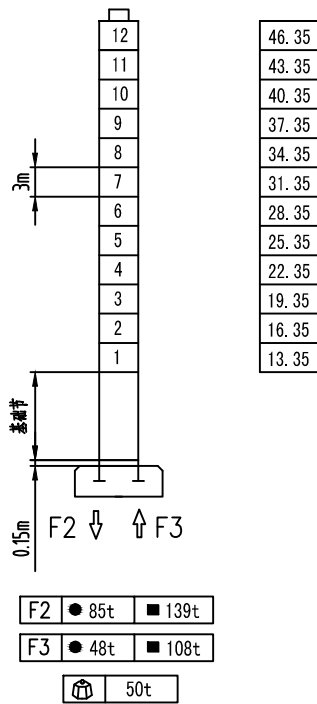


固定式附着高度 Anchoring height of stationary crane


★ 紧固附着框 Anchorages tightened

△ 放松附着框 Anchorages released


如需达到更高的高度，请与我们联系。For greater heights, consult us.

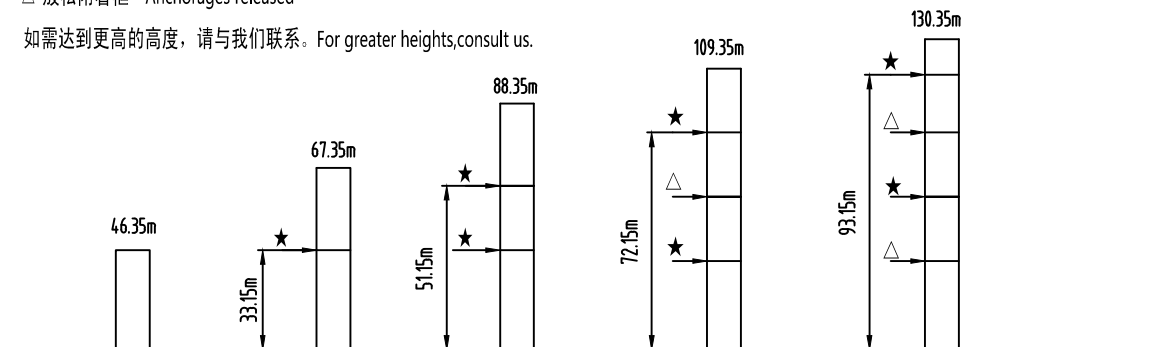


# 载荷特性 Load diagrams

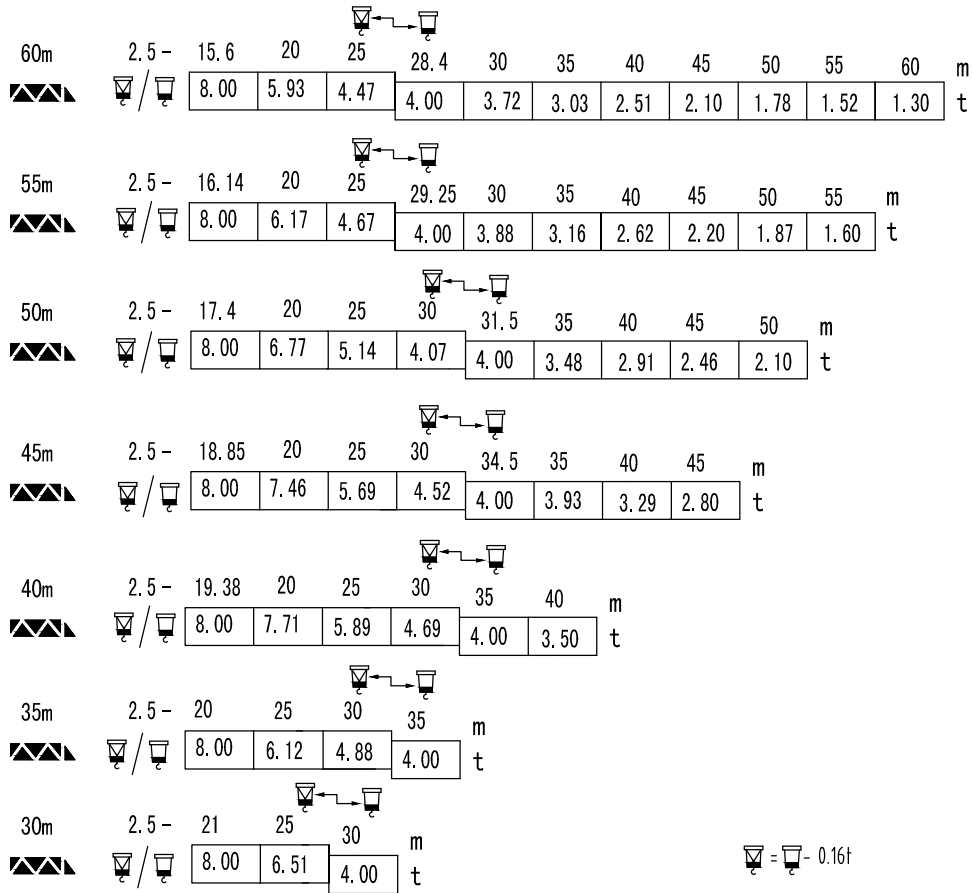

标准小车可使用 2/4倍率绳 standard trolley 2/4 fall.  
 使用四倍率时, 应从二倍率的载荷中减去0.16吨  
 When using , subtract 0.16t from the loads

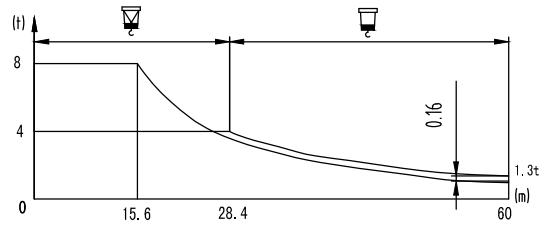

## 内爬塔机 Climbing crane









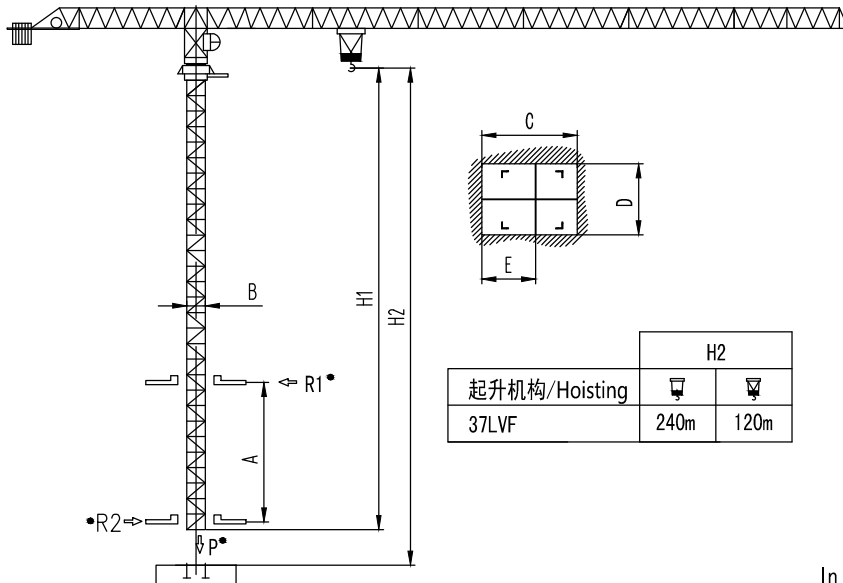












起升机构/Hoisting	H2	
37LVF	240m	120m







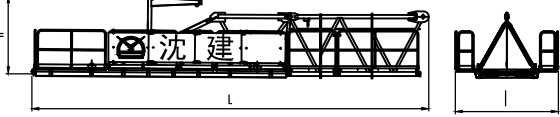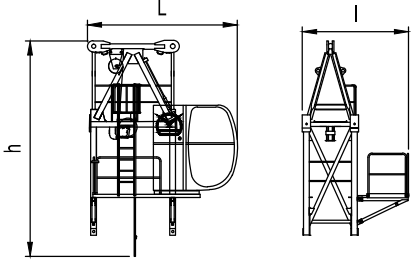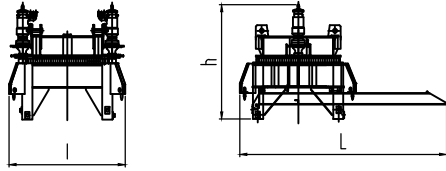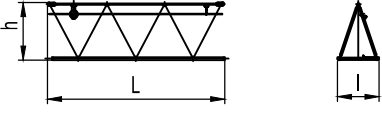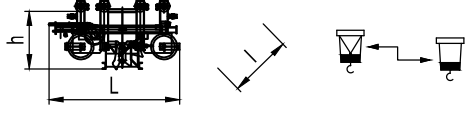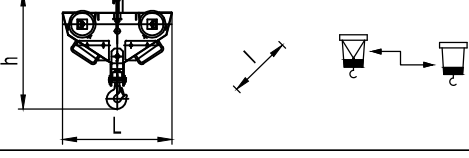

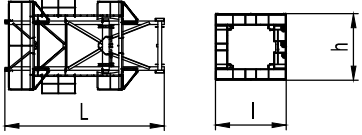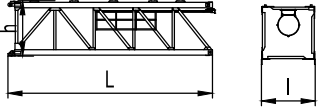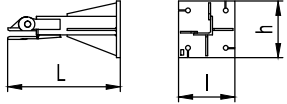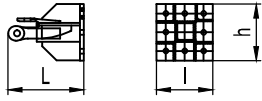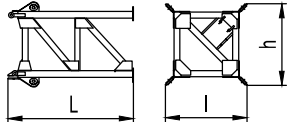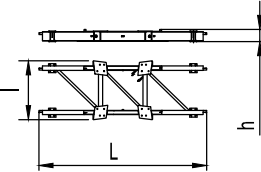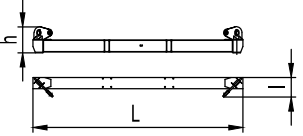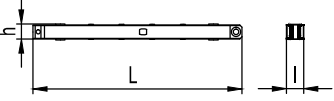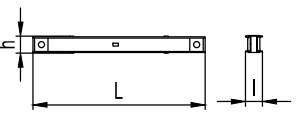
A	12m-19m
B	1.6m
C	2.31m
D	1.77m
E	1.36m
H1	44.7m
R1*	24500Kg
R2*	13900Kg
P*	73500Kg

● 工作状态无系数  
 In service without coefficient



外形尺寸重量表 Dimensions weights

塔机回转部分 Slewing		L(m)	l(m)	h(m)	Kg	
平衡臂 Counter-jib		17.354	2.878	2.253	5139	
塔头 Cat-head		3.75	4.5	4.3	2810	
回转机构 Slewing mechanism		4.343	2.057	2.29	3865.3	
起重臂节 Jib section		1	10.342	1.2	1.866	3077
起重臂节 Jib section		2	10.277	1.2	1.825	2357
起重臂节 Jib section		3	10.23	1.2	1.775	1778
		4	10.175	1.2	1.745	1305
		5	10.15	1.2	1.73	1080
起重臂节 Jib section		6	5.115	1.2	1.67	378
		7	5.115	1.2	1.67	349
变幅小车 Trolley		1.6625	1.378	0.87	394	
吊钩滑轮组 Hook assembly		1.348	1.58	1.189	292	

顶升装置 Telescoping equipment		L(m)	l(m)	h(m)	Kg
顶升套架 Telescopic cage		6.785	3.624	3.634	3495
基础节 Basic mast		7.745	2.027	1.668	2513
标准节 Standard mast		3.241	1.6	1.668	1180
底部 Base					
固定支脚 Fixing angles		1.2	0.49	0.49	181.5
固定支脚 Fixing angles		0.734	0.6	0.6	253
底架塔节 Chassis mast		3.69	2.00	2.00	2240
底架纵梁 Side member		6.32	2.08	0.54	1200
底架横梁 Traverse		4.88	0.467	0.705	1110
底架撑杆 Brace rod		3.86	0.27	0.28	350
底架水平杆 Horizontal member		1.66	0.17	0.12	65

机构特性 Mechanisms specification															kw
起升 Hoisting		37LVF	m/min	0-5	0-20	0-40	0-61	0-82	0-2.5	0-10	0-20	0-30.5	0-41	490	37
			t	4	4	4	2	1	8	8	8	4	2		
变幅 Trolleying		4TVF	m/min	0-55											4
		4T3V4	m/min	7.2 30 60											
回转 Slewing		5.5SVF	r/min	0-0.8											5.5x2
		95SVT		95Nm <sup>2</sup>											
行走 Travelling		4TRVF	m/min	0-12											4x4
 电源		Power Supply		380V 50Hz /440V 60Hz											
KVA 供电容量		Necessary Electric Power		60KVA											
平衡臂配重 Counter-jib ballast															
						 (t)									
				60m	17.75m	14.3									
				55m	17.75m	13.1									
				50m	17.75m	12.3									
				45m	17.75m	10.7									
				40m	17.75m	9.7									
				35m	17.75m	7.9									
				30m	17.75m	7.7									

可变换的其它安装方式  
Mounting possibilities



 同我们协商  
Consult us

F 反力      ● 工作状态      In service      ⊕ 自重      不带载荷及配重，最大臂长及标准高度时的自重。  
Reactions    ■ 非工作状态      Out of service      Self-load      Without load and counter-weight with longest jib and standard height